



## Brief paper

Delayed point control of a reaction–diffusion PDE under discrete-time point measurements<sup>☆</sup>Anton Selivanov<sup>\*</sup>, Emilia Fridman

School of Electrical Engineering, Tel Aviv University, Israel

## ARTICLE INFO

## Article history:

Received 23 April 2017

Received in revised form 7 December 2017

Accepted 6 June 2018

## Keywords:

Distributed parameter systems

Boundary control

Point control

Input delay

Networked control systems

## ABSTRACT

We consider stabilization problem for reaction–diffusion PDEs with point actuations subject to a known constant delay. The point measurements are sampled in time and transmitted through a communication network with a time-varying delay. To compensate the input delay, we construct an observer for the future value of the state. Using a time-varying observer gain, we ensure that the estimation error vanishes exponentially with a desired decay rate if the delays and sampling intervals are small enough while the number of sensors is large enough. The convergence conditions are obtained using a Lyapunov–Krasovskii functional, which leads to linear matrix inequalities (LMIs). We design output–feedback point controllers in the presence of input delays using the above observer. The boundary controller is constructed using the backstepping transformation, which leads to a target system containing the exponentially decaying estimation error. The in-domain point controller is designed and analysed using an improved Wirtinger-based inequality. We show that both controllers can guarantee the exponential stability of the closed-loop system with an arbitrary decay rate smaller than that of the observer's estimation error.

© 2018 Elsevier Ltd. All rights reserved.

## 1. Introduction

Networked control systems (NCSs) are composed of spatially distributed sensors, controllers, and actuators connected through a shared communication network. Such systems have become widespread due to great advantages they bring, such as long distance control, reduced system wiring, low cost, increased system agility, ease of reconfiguration, diagnosis, and maintenance (Antsaklis & Baillieul, 2004; Hespanha, Naghshtabrizi, & Xu, 2007). The main theoretical challenges caused by networked architecture are data sampling and transmission delays, which have been extensively studied for finite-dimensional plants. In particular, predictors, originally proposed for continuous-time measurements (Artstein, 1982; Manitius & Olbrot, 1979; Smith, 1957), have been extended to discrete-time measurements for both static (Castillo-Toledo, Di Gennaro, & Sandoval Castro, 2010; Karafyllis & Krstic, 2012; Lozano, Castillo, Garcia, & Dzul, 2004; Selivanov & Fridman,

2016c) and dynamic feedback (Karafyllis & Krstic, 2016b; Karafyllis, Krstic, Ahmed-Ali, & Lamnabhi-Lagarrigue, 2014; Selivanov & Fridman, 2016b).

Another way to compensate the input delay is to use an observer that predicts the future value of the state (Besancon, Georges, & Benayache, 2007). Such observer is a copy of the plant shifted in time with a correcting term that is proportional to the difference between the last available measurement and correspondingly delayed observer output. The stability analysis consists in proving the observer's robustness with respect to measurement delays. This idea can be used to analyse chain observers (Ahmed-Ali, Cherrier, & Lamnabhi-Lagarrigue, 2012; Cacace, Germani, & Manes, 2010; Germani, Manes, & Pepe, 2002; Muralidhar & Subbarao, 2009) and sequential predictors (Ahmed-Ali, Karafyllis, & Lamnabhi-Lagarrigue, 2013; Mazenc & Malisoff, 2016, 2017; Najafi, Hosseinnia, Sheikholeslam, & Karimadini, 2013). In Cacace, Germani, and Manes (2014), a time-varying injection gain was introduced in such an observer to improve its exponential convergence under delayed measurements. In Ahmed-Ali, Fridman, Giri, Burlion, and Lamnabhi-Lagarrigue (2016), time-varying observer/controller gains were used to increase the period of a sampled-data system.

A constant input delay can be compensated in a reaction–diffusion system by representing it as a PDE–PDE cascade (Krstic, 2009), which is analysed using the backstepping transformation (Krstic & Smyshlyaev, 2008; Smyshlyaev & Krstic, 2010). However,

<sup>☆</sup> Supported by Israel Science Foundation (Grant No. 1128/14). The material in this paper was partially presented at 56th IEEE Conference on Decision and Control, December 12–15, 2017, Melbourne, Australia. This paper was recommended for publication in revised form by Associate Editors Fouad Giri and Denis Dochain under the direction of Editor Miroslav Krstic.

<sup>\*</sup> Corresponding author.

E-mail addresses: [antonselivanov@gmail.com](mailto:antonselivanov@gmail.com) (A. Selivanov), [emilia@eng.tau.ac.il](mailto:emilia@eng.tau.ac.il) (E. Fridman).

this method is hard to combine with data sampling. In Logemann (2013) and Logemann, Rebarber, and Townley (2003, 2005), some qualitative stability results are provided for sampled-data infinite-dimensional systems in general form. The same problem can be studied using Galerkin’s method (see, e.g., Ghantasala & El-Farra, 2012; Sun, Ghantasala, & El-Farra, 2009; Yao & El-Farra, 2014 and references therein), which idea is to approximate the PDE by a finite-dimensional system capturing the dominant dynamics of the PDE. A drawback of such approach is the inherent loss of process information due to truncation before the controller design. Thus, it is difficult to guarantee the stability/performance of the original system.

Sampled-data observers under point measurements that enter the observer dynamics through shape functions were introduced for heat equations in Fridman and Blighovsky (2012). The stability analysis of the error equation was provided using the time-delay approach to sampled-data and network-based control (see Chapter 7 of Fridman, 2014 and the references therein). In Bar Am and Fridman (2014), Fridman and Bar Am (2013), Fridman and Blighovsky (2012), Selivanov and Fridman (2016a) and Selivanov and Fridman (2017b), Lyapunov–Krasovskii functionals were used to obtain LMI-based quantitative stability conditions for sampled-data control of parabolic PDEs. These works consider control applied through distributed shape functions. So far, it is not clear whether this direct Lyapunov–Krasovskii approach can be extended to state-feedback boundary or point control, since such control is represented by an unbounded operator (see Remark 2).

Some qualitative stability results for sampled-data state-feedback boundary control have been recently obtained in Karafyllis and Krstic (2018). The analysis is based on the Fourier method and Input-to-State Stability ideas of Karafyllis and Krstic (2016a). Robustness of boundary stabilization with respect to input delay may probably be studied in a manner similar to Karafyllis & Krstic (2018) leading to qualitative results. Quantitative conditions for delayed (boundary or in-domain) point control under sampled in time and space measurements are missing. Such conditions are important for practical implementation of point control.

In this paper, we introduce an observer-based design for delayed boundary and in-domain point control of a reaction-diffusion PDE under the discrete-time point measurements. Inspired by the ideas of Besancon et al. (2007), we construct an observer whose correction term is the difference between the currently available measurement and an artificially delayed observer’s output. This artificial delay essentially transforms the observer into a predictor and allows to compensate the input delay. By introducing a time-varying injection gain (Cacace et al., 2014) and performing the stability analysis in a manner similar to Fridman and Blighovsky (2012) and Selivanov and Fridman (2016a), we show that the estimation error exponentially vanishes with any desired decay rate if the delays and time-sampling intervals are small enough while the number of sensors is large enough. Such an observer allows to eliminate the constant input delay.

We show that the above observer can be efficiently used for boundary and in-domain point control subject to input delay. First, the boundary control is studied using the backstepping transformation (Krstic & Smyshlyaev, 2008; Smyshlyaev & Krstic, 2010), which leads to a target system containing the exponentially decaying estimation error. Then, the point controllers represented by the Dirac delta functions are studied using the results of Azouani and Titi (2014) and Pisano and Orlov (2017), which we improve by deriving a more precise Wirtinger-based inequality (Lemma 2). This allows to guarantee exponential stability with fewer actuators. We show that both the boundary control and the point control with large enough number of actuators guarantee the exponential stability of the closed-loop system with an arbitrary decay rate smaller than that of the observer’s estimation error. Preliminary

results on the boundary control have been published in Selivanov and Fridman (2017a).

### 1.1. Preliminaries

The following lemmas will be used in the proofs of the main results.

**Lemma 1** (Wirtinger Inequality, Hardy, Littlewood, & Pólya, 1952). For  $f \in \mathcal{H}^1(a, b)$ ,

$$\|f\|_{L^2}^2 \leq \frac{(b-a)^2}{\pi^2} \|f'\|_{L^2}^2 \quad \text{if } f(a) = f(b) = 0,$$

$$\|f\|_{L^2}^2 \leq \frac{4(b-a)^2}{\pi^2} \|f'\|_{L^2}^2 \quad \text{if } f(a) = 0 \text{ or } f(b) = 0.$$

**Lemma 2.** For  $f \in \mathcal{H}^1(a_1, a_2)$ ,  $\nu > 1$ , and  $i = 1, 2$ ,

$$\|f\|_{L^2(a_1, a_2)}^2 \leq \nu(a_2 - a_1) f^2(a_i) + \frac{4(a_2 - a_1)^2 \nu}{\pi^2(\nu - 1)} \|f'\|_{L^2(a_1, a_2)}^2$$

**Proof.** From Wirtinger’s inequality (Lemma 1),

$$\int_{a_1}^{a_2} (f(x) - f(a_i))^2 dx \leq \frac{4(a_2 - a_1)^2}{\pi^2} \int_{a_1}^{a_2} f_x^2(x) dx.$$

Since  $2f(x)f(a_i) \leq \frac{1}{\nu} f^2(x) + \nu f^2(a_i)$ , we obtain

$$\int_{a_1}^{a_2} f^2(x) dx + \int_{a_1}^{a_2} f^2(a_i) dx$$

$$\leq \frac{4(a_2 - a_1)^2}{\pi^2} \int_{a_1}^{a_2} f_x^2(x) dx + 2 \int_{a_1}^{a_2} f(x)f(a_i) dx$$

$$\leq \frac{4(a_2 - a_1)^2}{\pi^2} \int_{a_1}^{a_2} f_x^2(x) dx + \frac{1}{\nu} \int_{a_1}^{a_2} f^2(x) dx + \nu \int_{a_1}^{a_2} f^2(a_i) dx.$$

Reorganizing the terms, we prove the lemma. ■

**Remark 1.** In Azouani and Titi (2014) and Pisano and Orlov (2017) the inequality

$$\|f\|_{L^2(a_1, a_2)}^2 \leq 2(a_2 - a_1) f^2(a_i) + 2(a_2 - a_1)^2 \|f'\|_{L^2(a_1, a_2)}^2$$

was used to study point control of PDEs. By employing Wirtinger’s inequality, Lemma 2 provides tighter estimate: for  $\nu = 2$  it takes the form

$$\|f\|_{L^2(a_1, a_2)}^2 \leq 2(a_2 - a_1) f^2(a_i) + \frac{8(a_2 - a_1)^2}{\pi^2} \|f'\|_{L^2(a_1, a_2)}^2$$

with the last term more than two times smaller than in Azouani and Titi (2014) and Pisano and Orlov (2017).

**Lemma 3.** For any  $0 \leq \underline{a} < \bar{a}$ ,  $0 \leq \underline{b} < \bar{b}$ ,

$$\underline{a} + \underline{b} < K \leq \bar{a} + \bar{b} \Leftrightarrow \exists \mu \in (0, 1) : \begin{cases} \underline{a} < \mu K \leq \bar{a}, \\ \underline{b} < (1 - \mu)K \leq \bar{b}. \end{cases}$$

**Proof.** The relation  $\underline{a} + \underline{b} < K \leq \bar{a} + \bar{b}$  implies  $K - \bar{b} \leq \bar{a}$  and  $\underline{a} < K - \underline{b}$ . Therefore,

$$\exists \mu : \mu K \in (\underline{a}, \bar{a}) \cap [K - \bar{b}, K - \underline{b}] \neq \emptyset.$$

Since  $0 \leq \underline{a} < \mu K < K - \underline{b} \leq K$ , we have  $\mu \in (0, 1)$ . ■

## 2. Boundary control

We consider the system schematically presented in Fig. 1. The plant is governed by the reaction–diffusion PDE

$$\begin{aligned} z_t(x, t) &= z_{xx}(x, t) + az(x, t), \\ d_L z(0, t) + (1 - d_L) z_x(0, t) &= 0, \\ d_R z(1, t) + (1 - d_R) z_x(1, t) &= u(t - r), \end{aligned} \tag{1}$$

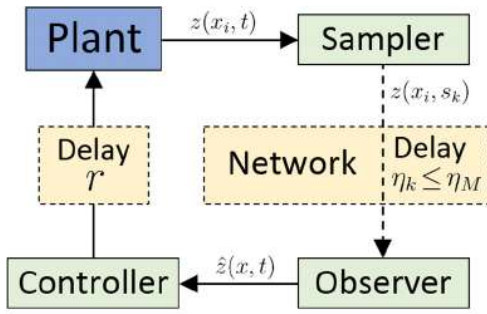


Fig. 1. System representation.

where  $z : [0, 1] \times [0, \infty) \rightarrow \mathbb{R}$  is the state,  $u$  is the boundary control, and  $r \geq 0$  is a known constant delay. Each constant  $d_L, d_R \in \{0, 1\}$  sets either the Dirichlet or the Neumann boundary condition. If  $u(t) = 0$ , the plant is unstable if the reaction coefficient  $a$  is large enough.

**Remark 2.** The robustness analysis of the boundary control with respect to the input delay is essentially more difficult than the one for distributed control as considered in Fridman and Blighovsky (2012) and Selivanov and Fridman (2016a). To illustrate this, consider (1) with  $d_L = d_R = 1$  and the state-feedback backstepping-based controller (Krstic & Smyshlyaev, 2008). It can be shown that the backstepping transformation leads to the target system with the boundary delay

$$\begin{aligned} w_t(x, t) &= w_{xx}(x, t), \\ w(0, t) &= 0, \\ w(1, t) &= - \int_0^1 l(1, y)[w(y, t) - w(y, t - r)] dy, \end{aligned}$$

where  $l$  is the kernel of the inverse transformation (Krstic & Smyshlyaev, 2008, Chapter 4). It appears that finding an appropriate Lyapunov functional for delay-dependent stability in the case of boundary delay is an extremely difficult problem. Even Lyapunov-based ISS analysis in the case of boundary disturbances (which is the first step towards delay-dependent stability analysis) is problematic, since the disturbance is multiplied by an unbounded operator (Karafyllis & Krstic, 2016a). To avoid these difficulties, we compensate the input delay using an appropriate observer.

We assume that  $N$  in-domain sensors provide point measurements of the state, which are sampled in time and transmitted through a network with a time-varying delay. That is, the values  $z(x_i, s_k)$  are available at time  $t_k$ , where

$$\begin{aligned} 0 &\leq x_1 < x_2 < \dots < x_N \leq 1, \\ 0 &= s_0 < s_1 < \dots, \quad s_{k+1} - s_k \leq h, \quad \lim s_k = \infty, \\ t_k &= s_k + \eta_k, \quad \eta_k \in [0, \eta_M] : t_k \leq t_{k+1}. \end{aligned} \quad (2)$$

### 2.1. Observer/predictor construction

We construct an observer to estimate the future value of the state:  $\hat{z}(x, t) \approx z(x, t + r)$ ,

$$\begin{aligned} \hat{z}_t(x, t) &= \hat{z}_{xx}(x, t) + a\hat{z}(x, t) + Le^{-\alpha_0(t+r-s_k)} \times \\ &\quad \sum_{i=1}^N b_i(x)[\hat{z}(x_i, s_k - r) - z(x_i, s_k)], \\ &\quad t \in [t_k, t_{k+1}), k = 0, 1, 2, \dots \end{aligned} \quad (3)$$

$$\begin{aligned} d_L \hat{z}(0, t) + (1 - d_L) \hat{z}_x(0, t) &= 0, \\ d_R \hat{z}(1, t) + (1 - d_R) \hat{z}_x(1, t) &= u(t), \\ \hat{z}(\cdot, t) &= 0, \quad t \leq t_0. \end{aligned}$$




Fig. 2. Partition of  $[0, 1]$  with point measurements at  $x_i$ .

The observer (3) is obtained by shifting the plant (1) in time by  $r$  and introducing a correction term. The time-varying injection gain  $Le^{-\alpha_0(t+r-s_k)}$  will allow to guarantee that the observation error decays with the rate  $\alpha_0$  (Cacace et al., 2014). As in Fridman and Blighovsky (2012), the shape functions  $b_i \in L^2(0, 1)$  are given by

$$\begin{cases} b_i(x) = 1, & x \in \Omega_i, \\ b_i(x) = 0, & x \notin \Omega_i, \end{cases} \quad (4)$$

where  $\{\Omega_i\}$  is a partition of  $[0, 1]$  such that<sup>1</sup>  $x_i \in \Omega_i$  (Fig. 2).

Due to (1), (3), the observation/prediction error  $\bar{z}(x, t) = \hat{z}(x, t - r) - z(x, t)$  satisfies (if  $u(t) = 0$  for  $t < t_0$ )

$$\begin{aligned} \bar{z}_t &= \bar{z}_{xx} + a\bar{z}, \quad t \in [0, t_0 + r), \\ \bar{z}_t &= \bar{z}_{xx} + a\bar{z} + Le^{-\alpha_0(t-s_k)} \sum_{i=1}^N b_i(x)\bar{z}(x_i, s_k) \\ &\quad t \in [t_k + r, t_{k+1} + r), k = 0, 1, 2, \dots \end{aligned} \quad (5)$$

$$\begin{aligned} d_L \bar{z}(0, t) + (1 - d_L) \bar{z}_x(0, t) &= 0, \\ d_R \bar{z}(1, t) + (1 - d_R) \bar{z}_x(1, t) &= 0, \\ \bar{z}(\cdot, 0) &= -z(\cdot, 0). \end{aligned}$$

Now we study the well-posedness of (5) for the initial conditions  $\bar{z}(\cdot, 0) \in X$ , where

$$X = \{w \in \mathcal{H}^1(0, 1) \mid d_L w(0) = 0, d_R w(1) = 0\}$$

is the state space with the  $\mathcal{H}^1$ -norm. The system (5) can be presented in the form

$$\begin{aligned} \dot{\zeta}(t) + \mathcal{A}\zeta(t) &= 0, \quad t \in [0, t_0 + r), \\ \dot{\zeta}(t) + \mathcal{A}\zeta(t) &= f_k(t), \quad t \in [t_k + r, t_{k+1} + r), k = 0, 1, 2, \dots \end{aligned} \quad (6)$$

where  $\zeta(t) = \bar{z}(\cdot, t)$  and

$$\begin{aligned} \mathcal{A} : D(\mathcal{A}) &\rightarrow L^2(0, 1) \\ \mathcal{A}w &= -w'' - aw \end{aligned}$$

is a linear operator on the Hilbert space

$$D(\mathcal{A}) = \left\{ w \in \mathcal{H}^2(0, 1) \mid \begin{aligned} d_L w(0) + (1 - d_L) w'(0) &= 0 \\ d_R w(1) + (1 - d_R) w'(1) &= 0 \end{aligned} \right\}$$

with the inner product  $(u, v)_{D(\mathcal{A})} = (Au, Av)_{L^2}$ . The functions  $f_k \in L^2(t_k + r, t_{k+1} + r; L^2(0, 1))$  are given by

$$f_k(t) = Le^{-\alpha_0(t-s_k)} \sum_{i=1}^N b_i(\cdot)[\zeta(s_k)](x_i).$$

Note that each function  $f_k$  can be viewed as inhomogeneity, since  $[\zeta(s_k)](x_i)$  are fixed values for  $t \in [t_k + r, t_{k+1} + r)$ .

A strong solution of (6) on  $[0, T]$  is a function

$$\zeta \in L^2(0, T; D(\mathcal{A})) \cap C([0, T]; X), \quad (7)$$

such that  $\dot{\zeta} \in L^2(0, T; L^2(0, 1))$  and (6) holds almost everywhere on  $[0, T]$ .

The eigenfunctions of the Sturm–Liouville operator  $\mathcal{A}$  form a complete orthonormal basis of  $L^2(0, 1)$  (Naylor & Sell, 1982, Theorem 7.5.7). Therefore, in a manner similar to the proof of Robinson (2001, Theorem 7.7), one can show that (6) has a unique strong solution on  $[0, t_0 + r]$  and on every  $[t_k + r, t_{k+1} + r]$  for

<sup>1</sup> It is reasonable to choose  $\{\Omega_i\}$  that minimizes  $\max_i |\Omega_i|$ .

the initial conditions  $\zeta(0) \in X$ ,  $\zeta(t_k + r) \in X$ . Taking the endpoint value of the solution on  $[t_{k-1} + r, t_k + r]$  as the initial condition for the solution on  $[t_k + r, t_{k+1} + r]$ , we obtain the strong solution on  $[0, \infty)$  for the initial condition  $\zeta(0) = \bar{z}(\cdot, 0) \in X$ .

**Proposition 1.** For positive  $\alpha_0, \alpha_1$  let there exist a scalar  $G$  and positive scalars  $S_i, R_i, p_i$  with  $i = 1, 2$ , such that<sup>2</sup>

$$\Phi < 0, \quad \alpha_1 p_2 \leq 2p_1, \quad \begin{bmatrix} R_2 & G \\ G & R_2 \end{bmatrix} \geq 0,$$

with  $\Phi = \{\Phi_{ij}\}$  being a symmetric matrix composed from

$$\Phi_{11} = -R_1 e^{-\alpha_1 r} + S_1 + 2p_1(a + \alpha_0) + \alpha_1 - \pi^2(2p_1 - \alpha_1 p_2) \frac{\max\{d_L, d_R\}}{4 - 3d_L d_R},$$

$$\Phi_{12} = 1 - p_1 + p_2(a + \alpha_0),$$

$$\Phi_{13} = R_1 e^{-\alpha_1 r},$$

$$\Phi_{14} = \Phi_{16} = p_1 L,$$

$$\Phi_{22} = -2p_2 + r^2 R_1 + (h + \eta_M)^2 R_2,$$

$$\Phi_{24} = \Phi_{26} = p_2 L,$$

$$\Phi_{33} = -(R_1 + S_1 - S_2)e^{-\alpha_1 r} - R_2 e^{-\alpha_1 \tau_M},$$

$$\Phi_{34} = \Phi_{45} = (R_2 - G)e^{-\alpha_1 \tau_M},$$

$$\Phi_{35} = G e^{-\alpha_1 \tau_M},$$

$$\Phi_{44} = -2(R_2 - G)e^{-\alpha_1 \tau_M} - \alpha_1,$$

$$\Phi_{55} = -(R_2 + S_2)e^{-\alpha_1 \tau_M},$$

$$\Phi_{66} = -\frac{\alpha_1 p_2 \pi^2}{4 \max_i |\Omega_i|^2},$$

where  $\tau_M = h + \eta_M + r$ . Then the system (5) is exponentially stable with the decay rate  $\alpha_0$ , i.e.,

$$\|\bar{z}(\cdot, t)\|_{\mathcal{H}^1} \leq \bar{C} e^{-\alpha_0 t} \|\bar{z}(\cdot, 0)\|_{\mathcal{H}^1}, \quad t \geq 0 \quad (8)$$

for some  $\bar{C} > 0$ . Moreover,

$$\|\sigma(\cdot, t)\|_{L^2} \leq C_\sigma e^{-\alpha_0 t} \|z(\cdot, 0)\|_{\mathcal{H}^1}, \quad t \geq 0 \quad (9)$$

for some  $C_\sigma > 0$ , where

$$\sigma(x, t) = \sum_{i=1}^N b_i(x) \bar{z}(x_i, t), \quad x \in [0, 1], \quad t \geq 0. \quad (10)$$

**Proof** is given in Appendix A.

**Remark 3.** Using the standard arguments for time-delay systems (Fridman, 2014), one can show that the LMIs of Proposition 1 are feasible for any given  $\alpha_0$  and appropriate  $L$  if the delays  $r, \eta_M$ , sampling  $h$ , and the maximum subdomain length  $\max_i |\Omega_i|$  are small enough (i.e., the number of sensors  $N$  is large enough).

**Remark 4.** We consider synchronously sampled measurements  $z(x_i, s_k)$  because the proof of Proposition 1 uses the Halanay inequality (see (A.8)). The proof can be modified to cope with asynchronous sampling but this will lead to quite restrictive stability conditions (see Remark 1 of Selivanov & Fridman, 2016a).

## 2.2. Boundary controller synthesis

A boundary controller for (1) is constructed based on the estimation  $\hat{z}$  using the backstepping transformation (Krstic & Smyshlyaev, 2008; Smyshlyaev & Krstic, 2010)

$$w(x, t) = \hat{z}(x, t) - \int_0^x k(x, y) \hat{z}(y, t) dy, \quad (11)$$

<sup>2</sup> MATLAB codes for solving the LMIs are available at <https://github.com/AntonSelivanov/Aut18>.

where  $k(x, y)$  is the solution of

$$\begin{aligned} k_{xx}(x, y) - k_{yy}(x, y) &= \lambda k(x, y), \\ k(x, x) &= -\frac{\lambda}{2} x, \end{aligned} \quad (12)$$

$$d_L k(x, 0) + (1 - d_L) k_y(x, 0) = 0$$

with some  $\lambda \in \mathbb{R}$ . Such kernel  $k(x, y)$  exists and is bounded for any  $\lambda$  (see, e.g., Smyshlyaev & Krstic, 2010, Theorem 2.1). Let

$$\begin{aligned} u(t) &= \int_0^1 k(1, y) \hat{z}(y, t) dy && \text{if } d_R = 1, \\ u(t) &= k(1, 1) \hat{z}(1, t) + \int_0^1 k_x(1, y) \hat{z}(y, t) dy && \text{if } d_R = 0 \end{aligned} \quad (13)$$

for  $t \geq t_0$  and  $u(t) = 0$  for  $t < t_0$ . Then, performing calculations similar to those in Smyshlyaev and Krstic (2010, Chapter 2.2), we have

$$\begin{aligned} w_t(x, t) &= w_{xx}(x, t) - (\lambda - a)w(x, t) + v(x, t), \\ d_L w(0, t) + (1 - d_L)w_x(0, t) &= 0, \\ d_R w(1, t) + (1 - d_R)w_x(1, t) &= 0, \\ w(\cdot, t_0) &= 0 \end{aligned} \quad (14)$$

for  $t \geq t_0$ , where

$$v(x, t) = L e^{-\alpha_0(t+r-s_k)} \times \left[ \sigma(x, s_k) - \int_0^x k(x, y) \sigma(y, s_k) dy \right], \quad t \in [t_k, t_{k+1})$$

with  $\sigma(x, t)$  defined in (10). The proof of well-posedness of (14) is similar to that of (5). Since (11) is invertible, this implies the well-posedness of (3) and, consequently, of (1) (since  $z(x, t) = \hat{z}(x, t - r) - \bar{z}(x, t)$ ).

**Proposition 2.** Under the assumptions of Proposition 1, if

$$\lambda > \alpha_c + a - \frac{\max\{d_L, d_R\} \pi^2}{4 - 3d_L d_R + \pi^2} \quad (15)$$

with  $\alpha_c > 0$ , then the solutions of the system (14) satisfy

$$\|w(\cdot, t)\|_{\mathcal{H}^1} \leq C_w e^{-\min\{\alpha_0, \alpha_c\}t} \|z(\cdot, 0)\|_{\mathcal{H}^1}, \quad t \geq t_0 \quad (16)$$

with some  $C_w > 0$ .

**Proof** is given in Appendix B.

**Corollary 1.** If the assumptions of Proposition 1 are satisfied, the observer-based boundary controller (3), (12), (13) with  $\lambda$  satisfying (15) exponentially stabilizes the system (1) with the decay rate  $\min\{\alpha_0, \alpha_c\}$ , i.e.,

$$\|z(\cdot, t)\|_{\mathcal{H}^1} \leq C_z e^{-\min\{\alpha_0, \alpha_c\}t} \|z(\cdot, 0)\|_{\mathcal{H}^1}, \quad t \geq 0 \quad (17)$$

with some  $C_z > 0$ .

**Proof.** The transformation (11) has an inverse, which is bounded in  $\mathcal{H}^1$  norm (see, e.g., Smyshlyaev & Krstic, 2010). Therefore, there exists a constant  $\bar{C}$  such that

$$\|\hat{z}(\cdot, t)\|_{\mathcal{H}^1} \leq \bar{C} \|w(\cdot, t)\|_{\mathcal{H}^1} \stackrel{(16)}{\leq} \bar{C} C_w e^{-\min\{\alpha_0, \alpha_c\}t} \|z(\cdot, 0)\|_{\mathcal{H}^1}$$

for  $t \geq t_0$ . Since  $z(x, t) = \hat{z}(x, t - r) - \bar{z}(x, t)$ , the latter and (8) imply (17). ■

**Remark 5.** One can achieve an arbitrary decay rate in (17) if the delays and time-sampling intervals are small enough while the number of sensors is large enough. This follows from Remark 3 and the solvability of (12) for any  $\lambda$  satisfying (15).

### 3. Point control

In this section, we study point control modelled by the Dirac delta function. We consider the system schematically presented in Fig. 1 with the plant governed by

$$z_t(x, t) = z_{xx}(x, t) + az(x, t) + \sum_{j=1}^M \delta(x - \bar{x}_j) u_j(t - r), \quad (18)$$

$$\begin{aligned} d_L z(0, t) + (1 - d_L) z_x(0, t) &= 0, \\ d_R z(1, t) + (1 - d_R) z_x(1, t) &= 0, \end{aligned}$$

where  $z : [0, 1] \times [0, \infty) \rightarrow \mathbb{R}$  is the state,  $\delta(x)$  is the Dirac delta function representing point actuations,  $r \geq 0$  is a known constant delay, and  $u_j$  are the control signals applied at  $0 \leq \bar{x}_1 < \bar{x}_2 < \dots < \bar{x}_M \leq 1$ . Note that  $\bar{x}_1 = 0$  or  $\bar{x}_M = 1$  model boundary actuations. Each constant  $d_L, d_R \in \{0, 1\}$  sets either the Dirichlet or the Neumann boundary condition (if  $d_L = 1$  then  $\bar{x}_1 \neq 0$ , if  $d_R = 1$  then  $\bar{x}_M \neq 1$ ).

Like in Section 2, the values of  $z(x_i, s_k)$  are available to the observer at time  $t_k$ , where  $x_i, s_k$ , and  $t_k$  satisfy (2). Note that  $x_i$  and  $\bar{x}_j$  are not related, that is, the sensors and actuators are not necessarily collocated.

We construct an observer similar to (3), which estimates the future value of the state:  $\hat{z}(x, t) \approx z(x, t + r)$ ,

$$\begin{aligned} \hat{z}_t(x, t) &= \hat{z}_{xx}(x, t) + a\hat{z}(x, t) + \sum_{j=1}^M \delta(x - \bar{x}_j) u_j(t) \\ &+ Le^{-\alpha_0(t+r-s_k)} \sum_{i=1}^N b_i(x) [\hat{z}(x_i, s_k - r) - z(x_i, s_k)], \quad (19) \\ &t \in [t_k, t_{k+1}), k = 0, 1, 2, \dots \end{aligned}$$

$$\begin{aligned} d_L \hat{z}(0, t) + (1 - d_L) \hat{z}_x(0, t) &= 0, \\ d_R \hat{z}(1, t) + (1 - d_R) \hat{z}_x(1, t) &= 0, \\ \hat{z}(\cdot, t) &= 0, \quad t \leq t_0 \end{aligned}$$

with the shape functions  $b_i \in L^2(0, 1)$  given in (4). The control signals are chosen as

$$u_j(t) = -K_j \hat{z}(\bar{x}_j, t), \quad j \in 1:M. \quad (20)$$

In view of (18)–(20), the observation/prediction error  $\bar{z}(x, t) = \hat{z}(x, t - r) - z(x, t)$  satisfies (5). Therefore, (8) and (9) hold under the assumptions of Proposition 1.

The solutions of (19), (20) should be understood in the weak sense. Namely, define the state space

$$X = \{w \in \mathcal{H}^1(0, 1) \mid d_L w(0) = 0, d_R w(1) = 0\}$$

with the  $\mathcal{H}^1$ -norm. Let  $X^*$  be its dual space. A weak solution of (19), (20) on  $[t_0, T]$  is a function

$$\hat{z} \in L^2(t_0, T; X) \cap C([t_0, T]; L^2(0, 1)), \quad (21)$$

such that  $\hat{z} \in L^2(t_0, T; X^*)$  and

$$\begin{aligned} \frac{d}{dt} \int_0^1 \hat{z}(\xi, t) \varphi(\xi) d\xi &= - \int_0^1 \hat{z}_\xi(\xi, t) \varphi_\xi(\xi) d\xi \\ &+ a \int_0^1 \hat{z}(\xi, t) \varphi(\xi) d\xi - \sum_{j=1}^M K_j \hat{z}(\bar{x}_j, t) \varphi(\bar{x}_j) \\ &+ \int_0^1 g(\xi, t) \varphi(\xi) d\xi \quad (22) \end{aligned}$$

for any  $\varphi \in X$  and almost all  $t \in [t_0, T]$ , where  $g \in L_{loc}^\infty(t_0, T; L^2(0, 1))$  is given by

$$g(\xi, t) = Le^{-\alpha_0(t+r-s_k)} \sum_{i=1}^N b_i(\xi) \bar{z}(x_i, s_k), \quad t \in [t_k, t_{k+1}).$$




Fig. 3. Partition of  $[0, 1]$  for point controllers.

Here,  $\bar{z}$  is the strong solution of (5), therefore,  $g$  is a well-defined inhomogeneity.

The condition (22) is motivated by the integration-by-parts formula. Using the standard Galerkin approximation procedure (see, e.g., (Pisano & Orlov, 2017)), one can show that (19), (20) has a unique weak solution on  $[t_0, \infty)$  for any initial conditions  $\hat{z}(\cdot, t_0) \in L^2(0, 1)$ , including  $\hat{z}(\cdot, t_0) = 0$  required in (19).

**Proposition 3.** Under the assumptions of Proposition 1, if

$$\begin{aligned} 2(a + \alpha_c) \max_{j \in 1:M} |\Delta_j^L|^2 &< \frac{\pi^2}{4}, \\ 2(a + \alpha_c) \max_{j \in 1:M} |\Delta_j^R|^2 &< \frac{\pi^2}{4}, \end{aligned} \quad (23)$$

where  $\{\Delta_j^L, \Delta_j^R\}$  is a partition,<sup>3</sup> of  $[0, 1]$  depicted in Fig. 3, then the solutions of the system (19) under the controllers (20) with

$$\begin{aligned} K_j \in & \left[ 2(a + \alpha_c) |\Delta_j^L|, \frac{\pi^2}{4|\Delta_j^L|} \right] & \text{if } |\Delta_j^R| = 0, \\ K_j \in & \left[ 2(a + \alpha_c) |\Delta_j^R|, \frac{\pi^2}{4|\Delta_j^R|} \right] & \text{if } |\Delta_j^L| = 0, \\ K_j \in & \left[ 2(a + \alpha_c) (|\Delta_j^L| + |\Delta_j^R|), \frac{\pi^2}{4} \left( \frac{1}{|\Delta_j^L|} + \frac{1}{|\Delta_j^R|} \right) \right] & \text{otherwise,} \end{aligned} \quad (24)$$

satisfy

$$\|\hat{z}(\cdot, t)\|_{L^2} \leq \hat{C} e^{-\min\{\alpha_0, \alpha_c\}t} \|z(\cdot, 0)\|_{\mathcal{H}^1}, \quad t \geq t_0 \quad (25)$$

with some  $\hat{C} > 0$ .

**Proof** is given in Appendix C.

The strong solution of (5) is also its weak solution. Since  $z(x, t) = \hat{z}(x, t - r) - \bar{z}(x, t)$ , there exists a weak solution of the closed-loop system (18)–(20). Using (8), (25) and the representation  $z(x, t) = \hat{z}(x, t - r) - \bar{z}(x, t)$ , we obtain the following corollary.

**Corollary 2.** If the assumptions of Proposition 1 are satisfied and (23) is true, then the observer-based point controller (19), (20), (24) exponentially stabilizes the system (18) with the decay rate  $\min\{\alpha_0, \alpha_c\}$ , i.e.,

$$\|z(\cdot, t)\|_{L^2} \leq C_z e^{-\min\{\alpha_0, \alpha_c\}t} \|z(\cdot, 0)\|_{\mathcal{H}^1}, \quad t \geq 0 \quad (26)$$

with some  $C_z > 0$ .

**Remark 6.** Similarly to the boundary control case, one can achieve an arbitrary decay rate in (26) if the delays and time-sampling intervals are small enough while the number of sensors and point actuators is large enough. This follows from Remark 3 and the feasibility of (23) for small enough subdomain lengths, i.e., for large enough number of actuation points.

<sup>3</sup> In view of (23) it is reasonable to choose  $|\Delta_j^R| = |\Delta_{j+1}^L|$ .

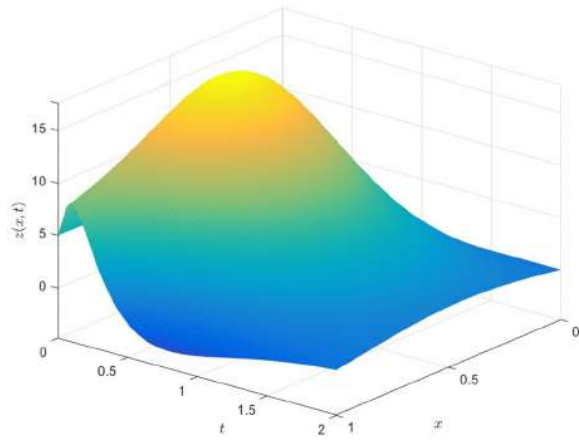


Fig. 4. Boundary control: The state  $z(x, t)$ .

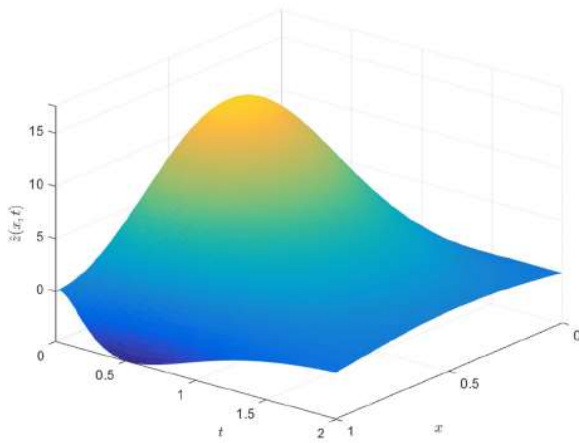


Fig. 5. Boundary control: The estimation/prediction  $\hat{z}(x, t)$ .

## 4. Example

### 4.1. Boundary control

Consider the plant (1) with  $a = 10, r = 0.05, d_L = 1, d_R = 0$ , which is unstable if  $u(t - r) = 0$ . Assume that there are  $N = 10$  in-domain sensors transmitting point measurements at  $x_i = \frac{2i-1}{2N}$ ,  $i \in 1 : N$  (the centres of  $\Omega_i = [\frac{i-1}{N}, \frac{i}{N}]$ ) with the sampling period  $h = 0.01$  and time-varying network delay  $\eta_k \leq \eta_M = 0.01$ . The conditions of Proposition 1 are satisfied with  $L = -10, \alpha_o = 0.5, \alpha_1 = 1$ . Therefore, the observer (3) provides a prediction of the state that converges with the rate  $\alpha_o$ . Taking  $\alpha_c = 0.5$ , we derive the boundary controller (13) with

$$k(1, 1) = -\frac{\lambda}{2}, \quad k_x(1, y) = -\lambda y \frac{I_2(\sqrt{\lambda(1-y^2)})}{1-y^2},$$

where  $\lambda = a + \alpha_o - \pi^2/(4 + \pi^2) + 10^{-5}$  and  $I_2$  is the Modified Bessel Function. Corollary 1 guarantees exponential stability of the plant with the decay rate  $\min\{\alpha_o, \alpha_c\} = 0.5$ .

The numerical simulations were performed with

$$z(x, 0) = 5 \sin\left(\frac{\pi x}{2}\right)$$

and randomly chosen  $\eta_k \in [0, 0.01]$  such that  $t_k \leq t_{k+1}$ . The results are presented in Figs. 4–7.

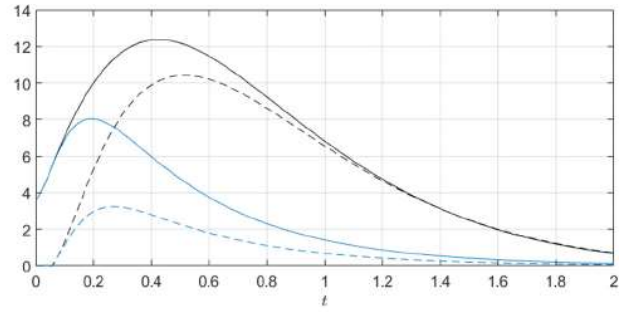


Fig. 6.  $\|z(\cdot, t)\|_{L_2}$  (solid line) and  $\|\hat{z}(\cdot, t - r)\|_{L_2}$  (dashed line) under boundary (black line) and point (blue line) control. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

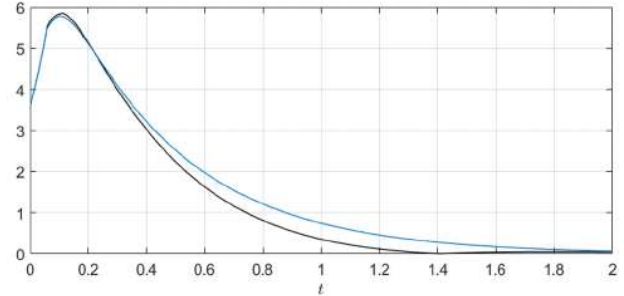


Fig. 7. The error  $\|z(\cdot, t) - \hat{z}(\cdot, t - r)\|_{L_2}$  under boundary (black line) and point (blue line) control. (For interpretation of the references to colour in this figure legend, the reader is referred to the web version of this article.)

### 4.2. Point control

Consider the plant (18) and the observer (19) with the same parameters as in Section 4.1. The conditions (23) are satisfied with  $\alpha_c = 0.5$  if the two point actuators (20) are located at  $\bar{x}_1 = 0.25, \bar{x}_2 = 0.75$  and the partition of  $[0, 1]$  is chosen to be uniform, i.e.,  $\Delta_j^L = \Delta_j^R = 0.25$  for  $j = 1, 2$ . Then Corollary 2 guarantees the exponential stability of the closed-loop system (18)–(20) with

$$K_j = \frac{\pi^2}{4} \left( \frac{1}{|\Delta_j^L|} + \frac{1}{|\Delta_j^R|} \right) = 2\pi^2, \quad j = 1, 2.$$

The numerical simulations were performed with the same initial conditions as in Section 4.1 and randomly chosen  $\eta_k \in [0, 0.01]$  such that  $t_k \leq t_{k+1}$ . The results are presented in Figs. 6–9. In Fig. 6 one can see that the point control with two actuators leads to smaller norm overshoot than the boundary control, which requires only one actuator.

## 5. Conclusion

Delayed boundary and in-domain point controllers for a reaction–diffusion PDE under the discrete-time point measurements were designed by employing observers that estimate the future value of the state. Quantitative LMI-based conditions were provided for the number of point measurements/actuators and the maximum delays and time-sampling intervals that preserve the stability of the closed-loop system. The results can be extended to smooth time-varying delays as considered in Mazenc and Malisoff (2016) and to sequential predictors. A challenging direction for the future research may be sampled-data implementation of the presented controllers.

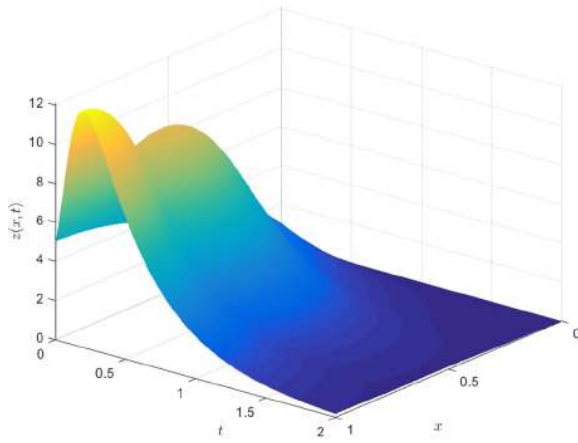


Fig. 8. Point control: The state  $z(x, t)$ .

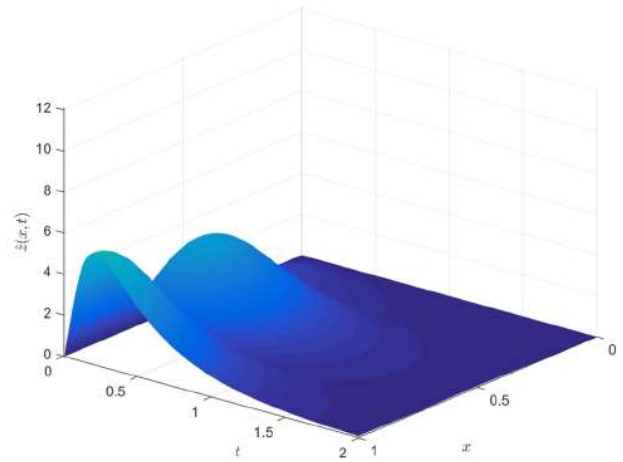


Fig. 9. Point control: The estimation/prediction  $\hat{z}(x, t)$ .

## Appendix A. Proof of Proposition 1

Let  $\zeta(x, t) = e^{\alpha_0 t} \bar{z}(x, t)$ . For  $t \geq t_0 + r$ , (5) implies

$$\begin{aligned} \zeta_t &= \zeta_{xx} + (a + \alpha_0)\zeta + L \sum_{i=1}^N b_i(x)\zeta(x_i, t - \tau(t)), \\ d_L \zeta(0, t) + (1 - d_L)\zeta_x(0, t) &= 0, \\ d_R \zeta(1, t) + (1 - d_R)\zeta_x(1, t) &= 0, \end{aligned} \quad (\text{A.1})$$

where

$$\begin{aligned} \tau(t) &= t - s_k, \quad t \in [t_k + r, t_{k+1} + r), \quad k = 0, 1, 2, \dots \\ r \leq \tau(t) &\leq \tau_M = r + h + \eta_M. \end{aligned}$$

Consider the Lyapunov–Krasovskii functional

$$V_\zeta = V_1 + V_2 + V_{S1} + V_{R1} + V_{S2} + V_{R2}, \quad (\text{A.2})$$

where

$$\begin{aligned} V_1 &= \int_0^1 \zeta^2(x, t) dx, \\ V_2 &= p_2 \int_0^1 \zeta_x^2(x, t) dx, \\ V_{S1} &= S_1 \int_0^1 \int_{t-r}^t e^{-\alpha_1(t-s)} \zeta^2(x, s) ds dx, \\ V_{R1} &= rR_1 \int_0^1 \int_{-r}^0 \int_{t+\theta}^t e^{-\alpha_1(t-s)} \zeta_s^2(x, s) ds d\theta dx, \\ V_{S2} &= S_2 \int_0^1 \int_{t-\tau_M}^{t-r} e^{-\alpha_1(t-s)} \zeta^2(x, s) ds dx, \\ V_{R2} &= (h + \eta_M)R_2 \int_0^1 \int_{-\tau_M}^{-r} \int_{t+\theta}^t e^{-\alpha_1(t-s)} \zeta_s^2(x, s) ds d\theta dx. \end{aligned}$$

Similarly to Liu and Fridman (2014), we formally set  $\zeta(\cdot, t) = \zeta(\cdot, 0)$  for  $t < 0$  so that  $V_\zeta$  is defined on, <sup>4</sup>  $[t_0 + r - \tau_M, \infty)$ . Note that for the strong solution (7) the functional  $V_\zeta$  is well-defined and

continuous. For  $t \geq t_0 + r$ ,

$$\begin{aligned} \dot{V}_1 + \alpha_1 V_1 &= 2 \int_0^1 \zeta \zeta_t + \alpha_1 \int_0^1 \zeta^2, \\ \dot{V}_2 + \alpha_1 V_2 &= 2p_2 \int_0^1 \zeta_x \zeta_{xt} + \alpha_1 p_2 \int_0^1 \zeta_x^2, \\ \dot{V}_{S1} + \alpha_1 V_{S1} &= S_1 \int_0^1 \zeta^2 - S_1 e^{-\alpha_1 r} \int_0^1 \zeta^2(x, t-r) dx, \\ \dot{V}_{S2} + \alpha_1 V_{S2} &= S_2 e^{-\alpha_1 r} \int_0^1 \zeta^2(x, t-r) dx \\ &\quad - S_2 e^{-\alpha_1 \tau_M} \int_0^1 \zeta^2(x, t-\tau_M) dx. \end{aligned}$$

Using Jensen's inequality (Gu, Kharitonov, & Chen, 2003, Proposition B.8),

$$\begin{aligned} \dot{V}_{R1} + \alpha_1 V_{R1} &= \\ r^2 R_1 \int_0^1 \zeta_t^2(x, t) dx - r R_1 \int_0^1 \int_{t-r}^t e^{-\alpha_1(t-s)} \zeta_s^2(x, s) ds dx \\ &\leq r^2 R_1 \int_0^1 \zeta_t^2(x, t) dx - R_1 e^{-\alpha_1 r} \int_0^1 (\zeta(x, t) - \zeta(x, t-r))^2 dx. \end{aligned}$$

Jensen's inequality and reciprocally convex approach (Park, Ko, & Jeong, 2011, Theorem 1) allow to obtain<sup>5</sup>

$$\begin{aligned} \dot{V}_{R2} + \alpha_1 V_{R2} &\leq (h + \eta_M)^2 R_2 \int_0^1 \zeta_t^2(x, t) dx - e^{-\alpha_1 \tau_M} \times \\ &\int_0^1 \begin{bmatrix} \zeta(x, t-r) - \zeta(x, t-\tau(t)) \\ \zeta(x, t-\tau(t)) - \zeta(x, t-\tau_M) \end{bmatrix}^T \begin{bmatrix} R_2 G \\ G R_2 \end{bmatrix} \\ &\quad \times \begin{bmatrix} \zeta(x, t-r) - \zeta(x, t-\tau(t)) \\ \zeta(x, t-\tau(t)) - \zeta(x, t-\tau_M) \end{bmatrix} dx. \end{aligned}$$

Instead of replacing  $\zeta_t$  with the right-hand side of (A.1), we employ the descriptor method (Fridman, 2001). Namely, (A.1) implies

$$\begin{aligned} 0 &= 2 \int_0^1 [p_1 \zeta(x, t) + p_2 \zeta_t(x, t)] [-\zeta_t(x, t) + \zeta_{xx}(x, t) \\ &\quad + (a + \alpha_0)\zeta(x, t) + L \sum_{i=1}^N b_i(x)\zeta(x_i, t - \tau(t))] dx, \end{aligned}$$

<sup>4</sup> This is required for (A.8) to be meaningful.

<sup>5</sup> Similar calculation is given in Selivanov and Fridman (2016a, (A.1)) in more detail.

which right-hand side will be added to  $\dot{V}_\zeta$ . Denoting

$$\kappa(x, t) = \zeta(x_i, t) - \zeta(x, t), \quad x \in \Omega_i, i \in 1:N \tag{A.3}$$

and using (4), the latter can be rewritten as

$$0 = 2 \sum_{i=1}^N \int_{\Omega_i} [p_1 \zeta + p_2 \zeta_t] [-\zeta_t + \zeta_{xx} + (a + \alpha_0) \zeta + L\kappa(x, t - \tau(t)) + L\zeta(x, t - \tau(t))] dx. \tag{A.4}$$

Integrating by parts and taking into account the boundary conditions with  $d_L, d_R \in \{0, 1\}$ , we obtain

$$2p_1 \sum_{i=1}^N \int_{\Omega_i} \zeta \zeta_{xx} = 2p_1 \int_0^1 \zeta \zeta_{xx} = 2p_1 \zeta \zeta_x \Big|_0^1 - 2p_1 \int_0^1 (\zeta_x)^2 = -2p_1 \sum_{i=1}^N \int_{\Omega_i} \zeta_x^2, \tag{A.5}$$

$$2p_2 \sum_{i=1}^N \int_{\Omega_i} \zeta_t \zeta_{xx} = 2p_2 \int_0^1 \zeta_t \zeta_{xx} = 2p_2 \zeta_t \zeta_x \Big|_0^1 - 2p_2 \int_0^1 \zeta_{xt} \zeta_x = -\dot{V}_2.$$

Since  $\alpha_1 p_2 \leq 2p_1$ , Wirtinger's inequality (Lemma 1) implies

$$0 \leq (2p_1 - \alpha_1 p_2) \max\{d_L, d_R\} \times \left[ \int_0^1 \zeta_x^2(x, t) dx - \frac{\pi^2}{4 - 3d_L d_R} \int_0^1 \zeta^2(x, t) dx \right]. \tag{A.6}$$

Denote  $[x_i^L, x_i^R] = \Omega_i$ . Since  $\kappa(x_i, t) = 0$  and  $\kappa_x = -\zeta_x$ ,

$$\int_{\Omega_i} \kappa^2 = \int_{x_i^L}^{x_i^R} \kappa^2 + \int_{x_i^L}^{x_i^R} \kappa^2 \stackrel{\text{Lemma 1}}{\leq} \frac{4|\Omega_i|^2}{\pi^2} \left[ \int_{x_i^L}^{x_i^R} \zeta_x^2 + \int_{x_i^L}^{x_i^R} \zeta_x^2 \right] \leq \frac{4 \max_i |\Omega_i|^2}{\pi^2} \int_{\Omega_i} \zeta_x^2. \tag{A.7}$$

Therefore, for any  $\alpha_2 > 0$ ,

$$\begin{aligned} -\alpha_2 \sup_{\theta \in [t-\tau_M, t]} V_\zeta(\theta) &\leq -\alpha_2 V_\zeta(t - \tau(t)) \\ &\leq -\alpha_2 \sum_{i=1}^N \int_{\Omega_i} \zeta^2(x, t - \tau(t)) dx - \alpha_2 p_2 \sum_{i=1}^N \int_{\Omega_i} \zeta_x^2(x, t - \tau(t)) dx \\ &\leq -\alpha_2 \sum_{i=1}^N \int_{\Omega_i} \zeta^2(x, t - \tau(t)) dx \\ &\quad - \frac{\alpha_2 p_2 \pi^2}{4 \max_i |\Omega_i|^2} \sum_{i=1}^N \int_{\Omega_i} \kappa^2(x, t - \tau(t)) dx. \end{aligned}$$

Consider the matrix  $\Psi$  that coincides with  $\Phi$  except for

$$\Psi_{44} = -2(R_2 - G)e^{-\alpha_1 \tau_M} - \alpha_2,$$

$$\Psi_{66} = -\frac{\alpha_2 p_2 \pi^2}{4 \max_i |\Omega_i|^2}.$$

Since  $\Phi < 0$  is a strict inequality,  $\Psi < 0$  holds for large enough  $\alpha_2 < \alpha_1$ . By adding the right-hand sides of (A.4), (A.6) to  $\dot{V}_\zeta$  and using (A.5), we obtain

$$\begin{aligned} \dot{V}_\zeta + \alpha_1 V_\zeta - \alpha_2 \sup_{\theta \in [t-\tau_M, t]} V_\zeta(\theta) \\ \leq \sum_{i=1}^N \int_{\Omega_i} \tau(x, t) \Psi(x, t) dx \\ - (1 - \max\{d_L, d_R\})(2p_1 - \alpha_1 p_2) \|\zeta_x(\cdot, t)\|_{L^2}^2 \end{aligned}$$

with  $(x, t) = \text{col}\{\zeta, \zeta_t, \zeta(x, t - r), \zeta(x, t - \tau(t)), \zeta(x, t - \tau_M), \kappa(x, t - \tau(t))\}$ . Since  $\Psi < 0$  and  $2p_1 \geq \alpha_1 p_2$ ,

$$\dot{V}_\zeta(t) \leq -\alpha_1 V_\zeta(t) + \alpha_2 \sup_{\theta \in [t-\tau_M, t]} V_\zeta(\theta), \quad t \geq t_0 + r.$$

The Halanay inequality (Fridman, 2014, Lemma 4.2) implies

$$V_\zeta(t) \leq e^{-\bar{\alpha}(t-t_0-r)} \sup_{\theta \in [t_0+r-\tau_M, t_0+r]} V_\zeta(\theta), \quad t \geq t_0 + r, \tag{A.8}$$

where  $\bar{\alpha}$  is the unique positive solution of  $\bar{\alpha} = \alpha_1 - \alpha_2 e^{\bar{\alpha} \tau_M}$ .

For  $t \in [0, t_0+r]$ , (5) implies (A.1) with  $L = 0$ . Then calculations similar to the above imply  $\dot{V}_\zeta(t) \leq \delta V_\zeta(t)$  for  $t \in [0, t_0 + r]$  with large enough  $\delta$ . Therefore,

$$V_\zeta(t) \leq e^{\delta t} V_\zeta(0) \leq e^{\delta(t_0+r)} V_\zeta(0), \quad t \in [0, t_0 + r].$$

Moreover, since we set  $\zeta(\cdot, t) = \zeta(\cdot, 0)$  for  $t < 0$ ,

$$V_\zeta(t) = V_\zeta(0), \quad t \in [t_0 + r - \tau_M, 0].$$

Consequently,

$$\sup_{\theta \in [t_0+r-\tau_M, t_0+r]} V_\zeta(\theta) \leq e^{\delta(t_0+r)} V_\zeta(0) \leq C_V \|\zeta(\cdot, 0)\|_{\mathcal{H}^1}^2$$

for some  $C_V > 0$ . Recalling that  $\zeta(x, t) = e^{\alpha_0 t} \bar{z}(x, t)$ , the latter and (A.8) yield

$$\begin{aligned} \|\bar{z}(\cdot, t)\|_{\mathcal{H}^1}^2 &= e^{-2\alpha_0 t} \|\zeta(\cdot, t)\|_{\mathcal{H}^1}^2 \leq \frac{e^{-2\alpha_0 t}}{\min\{1, p_2\}} V_\zeta(t) \\ &\leq \bar{C}^2 e^{-2\alpha_0 t} \|\zeta(\cdot, 0)\|_{\mathcal{H}^1}^2 = \bar{C}^2 e^{-2\alpha_0 t} \|\bar{z}(\cdot, 0)\|_{\mathcal{H}^1}^2 \end{aligned}$$

for  $t \geq 0$  with some  $\bar{C} > 0$ . This proves (8).

Using the notation (A.3),  $b_i(x)\zeta(x_i, t) = b_i(x)(\zeta(x, t) + \kappa(x, t))$  for any  $x \in [0, 1]$ . Therefore,

$$\begin{aligned} e^{2\alpha_0 t} \int_0^1 \sigma^2 &= \int_0^1 \left( \sum_{i=1}^N b_i(x) \zeta(x_i, t) \right)^2 dx \\ &= \int_0^1 (\zeta(x, t) + \kappa(x, t))^2 \left( \sum_{i=1}^N b_i(x) \right)^2 dx \\ &\leq 2 \int_0^1 \kappa^2 + 2 \int_0^1 \zeta^2 \stackrel{(A.7)}{\leq} 2 \max \left\{ 1, \frac{4 \max_i |\Omega_i|^2}{p_2 \pi^2} \right\} V_\zeta(t) \\ &\leq C_\sigma^2 \|\bar{z}(\cdot, 0)\|_{\mathcal{H}^1}^2 = C_\sigma^2 \|z(\cdot, 0)\|_{\mathcal{H}^1}^2 \end{aligned}$$

for  $t \geq 0$  with some  $C_\sigma > 0$ . This proves (9).

### Appendix B. Proof of Proposition 2

Consider  $V_w = V_{w_1} + V_{w_2}$  with

$$V_{w_1} = \int_0^1 w^2(x, t) dx, \quad V_{w_2} = \int_0^1 w_x^2(x, t) dx.$$

We have

$$\dot{V}_{w_1} = 2 \int_0^1 w w_{xx} - 2(\lambda - a) \int_0^1 w^2 + 2 \int_0^1 w v.$$

Since

$$2 \int_0^1 w w_{xx} = -2 \int_0^1 w_x^2 \quad (\text{integration by parts})$$

$$2 \int_0^1 w v \leq 2\mu \int_0^1 w^2 + \frac{1}{2\mu} \int_0^1 v^2 \quad (\text{Young's inequality})$$

with an arbitrary  $\mu > 0$ , we obtain

$$\dot{V}_{w_1} \leq -2 \int_0^1 w_x^2 - 2(\lambda - a - \mu) \int_0^1 w^2 + \frac{1}{2\mu} \int_0^1 v^2.$$

Using integration by parts, we have

$$\begin{aligned} \dot{V}_{w_2} &= 2 \int_0^1 w_x w_{xt} = -2 \int_0^1 w_{xx} w_t \\ &= -2 \int_0^1 w_{xx}^2 + 2(\lambda - a) \int_0^1 w_{xx} w - 2 \int_0^1 w_{xx} v. \end{aligned}$$



Since

$$2(\lambda - a) \int_0^1 w_{xx} w = -2(\lambda - a) \int_0^1 w_x^2 \quad (\text{int. by parts}),$$

$$-2 \int_0^1 w_{xx} v \leq 2 \int_0^1 w_x^2 + \frac{1}{2} \int_0^1 v^2 \quad (\text{Young's inequality}),$$

we obtain

$$\dot{V}_{w2} \leq -2(\lambda - a) \int_0^1 w_x^2 + \frac{1}{2} \int_0^1 v^2.$$

Summing up, for any  $\mu > 0$

$$\dot{V}_w + 2\alpha_c V_w \leq -2(1 + \lambda - a - \alpha_c) \|w_x\|_{L^2}^2$$

$$-2(\lambda - a - \alpha_c - \mu) \|w\|_{L^2}^2 + \left(\frac{1}{2\mu} + \frac{1}{2}\right) \int_0^1 v^2.$$

The condition (15) yields  $1 + \lambda - a - \alpha_c > 0$ . Then, using

$$-\|w_x\|_{L^2}^2 \stackrel{\text{Lemma 1}}{\leq} -\frac{\max\{d_L, d_R\} \pi^2}{4 - 3d_L d_R} \|w\|_{L^2}^2,$$

and (15), for small enough  $\mu > 0$ , we obtain

$$\dot{V}_w \leq -2\alpha_c V_w + \left(\frac{1}{2\mu} + \frac{1}{2}\right) \int_0^1 v^2.$$

Since  $k(x, y)$  is bounded, there exists  $C_v > 0$  such that

$$\int_0^1 v^2(x, t) dx \leq C_v e^{-2\alpha_o(t-s_k)} \|\sigma(\cdot, s_k)\|_{L^2}^2$$

$$\stackrel{(9)}{\leq} C_v C_\sigma^2 e^{-2\alpha_o t} \|z(\cdot, 0)\|_{\mathcal{H}^1}^2.$$

Summing up,

$$\dot{V}_w(t) \leq -2\alpha_c V_w(t) + \left(\frac{1}{2\mu} + \frac{1}{2}\right) C_v C_\sigma^2 e^{-2\alpha_o t} \|z(\cdot, 0)\|_{\mathcal{H}^1}^2.$$

If  $\alpha_c \neq \alpha_o$ , the comparison principle implies (16) (note that  $V_w(t_0) = 0$ ). If (15) holds for  $\alpha_c = \alpha_o$ , it remains true for slightly larger  $\alpha'_c > \alpha_c$ , implying (16) for  $\alpha_c$ .

### Appendix C. Proof of Proposition 3

Consider the Lyapunov functional  $\hat{V} = \int_0^1 \hat{z}^2(x, t) dx$ , which is well-defined and continuous for the weak solution (21). Using (22) with  $\varphi(\xi) = \hat{z}(\xi, t)$ , we calculate the derivative  $\dot{\hat{V}}$  along (19), (20):

$$\dot{\hat{V}} = -2 \int_0^1 \hat{z}_x^2 + 2a \int_0^1 \hat{z}^2 - 2 \sum_{j=1}^M K_j \hat{z}^2(\bar{x}_j, t) + 2 \int_0^1 \hat{z} \hat{v},$$

where

$$\hat{v}(x, t) = L e^{-\alpha_o(t+r-s_k)} \sigma(x, s_k), \quad t \in [t_k, t_{k+1})$$

with  $\sigma$  defined in (10). For  $\epsilon > 0$  such that

$$2(a + \alpha_c + \epsilon)(|\Delta_j^L| + |\Delta_j^R|) < K_j, \quad \forall j \in 1 : M$$

(it exists due to (24)), Young's inequality implies

$$2 \int_0^1 \hat{z} \hat{v} \leq 2\epsilon \int_0^1 \hat{z}^2 + \frac{1}{2\epsilon} \int_0^1 \hat{v}^2.$$

Thus,

$$\dot{\hat{V}} + 2\alpha_c \hat{V} \leq -2 \int_0^1 \hat{z}_x^2 + 2(a + \alpha_c + \epsilon) \int_0^1 \hat{z}^2$$

$$-2 \sum_{j=1}^M K_j \hat{z}^2(\bar{x}_j, t) + \frac{1}{2\epsilon} \int_0^1 \hat{v}^2.$$

Let  $|\Delta_j^L| |\Delta_j^R| \neq 0$ . Using Lemma 2 (with  $\nu = 2$  for simplicity), for any  $\mu_j \in (0, 1)$  we have

$$-2K_j \hat{z}^2(\bar{x}_j, t) = -2\mu_j K_j \hat{z}^2(\bar{x}_j, t) - 2(1 - \mu_j) K_j \hat{z}^2(\bar{x}_j, t)$$

$$\leq -\frac{\mu_j K_j}{|\Delta_j^L|} \int_{\Delta_j^L} \hat{z}^2 + \mu_j K_j \frac{8|\Delta_j^L|}{\pi^2} \int_{\Delta_j^L} \hat{z}_x^2$$

$$- \frac{(1 - \mu_j) K_j}{|\Delta_j^R|} \int_{\Delta_j^R} \hat{z}^2 + (1 - \mu_j) K_j \frac{8|\Delta_j^R|}{\pi^2} \int_{\Delta_j^R} \hat{z}_x^2,$$

which leads to

$$\dot{\hat{V}} + 2\alpha_c \hat{V} \leq \sum_{j=1}^M \left(-2 + \mu_j K_j \frac{8|\Delta_j^L|}{\pi^2}\right) \int_{\Delta_j^L} \hat{z}_x^2$$

$$+ \sum_{j=1}^M \left(-2 + (1 - \mu_j) K_j \frac{8|\Delta_j^R|}{\pi^2}\right) \int_{\Delta_j^R} \hat{z}_x^2$$

$$+ \sum_{j=1}^M \left(2(a + \alpha_c + \epsilon) - \frac{\mu_j K_j}{\Delta_j^L}\right) \int_{\Delta_j^L} \hat{z}^2$$

$$+ \sum_{j=1}^M \left(2(a + \alpha_c + \epsilon) - \frac{(1 - \mu_j) K_j}{\Delta_j^R}\right) \int_{\Delta_j^R} \hat{z}^2$$

$$+ \frac{1}{2\epsilon} \int_0^1 \hat{v}^2$$

In view of (23) and (24), Lemma 3 with

$$\underline{a} = 2(a + \alpha_c + \epsilon) \Delta_j^L, \quad \bar{a} = \frac{\pi^2}{4\Delta_j^L},$$

$$\underline{b} = 2(a + \alpha_c + \epsilon) \Delta_j^R, \quad \bar{b} = \frac{\pi^2}{4\Delta_j^R}$$

guarantees the existence of  $\mu_j \in (0, 1)$  such that

$$\dot{\hat{V}} + 2\alpha_c \hat{V} \leq \frac{1}{2\epsilon} \int_0^1 \hat{v}^2.$$

The calculations are similar if  $|\Delta_j^L| = 0$  (with  $\mu_j = 0$ ) or  $|\Delta_j^R| = 0$  (with  $\mu_j = 1$ ). Using the definition of  $\hat{v}$ ,

$$\int_0^1 \hat{v}^2 \leq L^2 e^{-2\alpha_o(t+r-s_k)} \|\sigma(\cdot, s_k)\|_{L^2}^2$$

$$\stackrel{(9)}{\leq} e^{-2\alpha_o t} C \|z(\cdot, 0)\|_{\mathcal{H}^1}^2$$

with  $C = L^2 e^{-2\alpha_o r} C_\sigma^2$ . Therefore,

$$\dot{\hat{V}} \leq -2\alpha_c \hat{V} + e^{-2\alpha_o t} \frac{C}{2\epsilon} \|z(\cdot, 0)\|_{\mathcal{H}^1}^2.$$

If  $\alpha_c \neq \alpha_o$ , the comparison principle implies (25) (note that  $\hat{V}(t_0) = 0$ ). If the conditions of Proposition 3 hold for  $\alpha_c = \alpha_o$ , they remain true for slightly larger  $\alpha'_c > \alpha_c$ , implying (25) for  $\alpha_c$ .

### References

- Ahmed-Ali, T., Cherrier, E., & Lamnabhi-Lagarrigue, F. (2012). Cascade high gain predictors for a class of nonlinear systems. *IEEE Transactions on Automatic Control*, 57(1), 224–229.
- Ahmed-Ali, T., Fridman, E., Giri, F., Burlion, L., & Lamnabhi-Lagarrigue, F. (2016). Using exponential time-varying gains for sampled-data stabilization and estimation. *Automatica*, 67, 244–251.
- Ahmed-Ali, T., Karafyllis, I., & Lamnabhi-Lagarrigue, F. (2013). Global exponential sampled-data observers for nonlinear systems with delayed measurements. *Systems & Control Letters*, 62(7), 539–549.
- Antsaklis, P. J., & Baillieul, J. (2004). Guest editorial special issue on networked control systems. *IEEE Transactions on Automatic Control*, 49(9), 1421–1423.
- Artstein, Z. (1982). Linear systems with delayed controls: A reduction. *IEEE Transactions on Automatic Control*, 27(4), 869–879.

- Azouani, A., & Titi, E. S. (2014). Feedback control of nonlinear dissipative systems by finite determining parameters – A reaction–diffusion paradigm. *Evolution Equations and Control Theory*, 3(4), 579–594.
- Bar Am, N., & Fridman, E. (2014). Network-based  $H_\infty$  filtering of parabolic systems. *Automatica*, 50(12), 3139–3146.
- Besancon, G., Georges, D., & Benayache, Z. (2007). Asymptotic state prediction for continuous-time systems with delayed input and application to control. In *European control conference* (pp. 1786–1791).
- Cacace, F., Germani, A., & Manes, C. (2010). An observer for a class of nonlinear systems with time varying observation delay. *Systems & Control Letters*, 59(5), 305–312.
- Cacace, F., Germani, A., & Manes, C. (2014). Predictor-based control of linear systems with large and variable measurement delays. *International Journal of Control*, 87(4), 704–714.
- Castillo-Toledo, B., Di Gennaro, S., & Sandoval Castro, G. (2010). Stability analysis for a class of sampled nonlinear systems with time-delay. In *49th IEEE conference on decision and control* (pp. 1575–1580).
- Fridman, E. (2001). New Lyapunov–Krasovskii functionals for stability of linear retarded and neutral type systems. *Systems & Control Letters*, 43, 309–319.
- Fridman, E. (2014). *Introduction to time-delay systems: Analysis and control*. Birkhäuser Basel.
- Fridman, E., & Bar Am, N. (2013). Sampled-data distributed  $H_\infty$  control of transport reaction systems. *SIAM Journal on Control and Optimization*, 51(2), 1500–1527.
- Fridman, E., & Blichovsky, A. (2012). Robust sampled-data control of a class of semilinear parabolic systems. *Automatica*, 48(5), 826–836.
- Germani, A., Manes, C., & Pepe, P. (2002). A new approach to state observation of nonlinear systems with delayed output. *IEEE Transactions on Automatic Control*, 47(1), 96–101.
- Ghantasala, S., & El-Farra, N. H. (2012). Active fault-tolerant control of sampled-data nonlinear distributed parameter systems. *International Journal of Robust and Nonlinear Control*, 22, 24–42.
- Gu, K., Kharitonov, V. L., & Chen, J. (2003). *Stability of time-delay systems*. Boston: Birkhäuser.
- Hardy, G., Littlewood, J., & Pólya, G. (1952). *Inequalities*. Cambridge University Press.
- Hespanha, J. P., Naghshtabrizi, P., & Xu, Y. (2007). A survey of recent results in networked control systems. *Proceedings of the IEEE*, 95(1), 138–162.
- Karafyllis, I., & Krstic, M. (2012). Nonlinear stabilization under sampled and delayed measurements, and with inputs subject to delay and zero-order hold. *IEEE Transactions on Automatic Control*, 57(5), 1141–1154.
- Karafyllis, I., & Krstic, M. (2016a). ISS with respect to boundary disturbances for 1-D parabolic PDEs. *IEEE Transactions on Automatic Control*, 61(12), 1–23.
- Karafyllis, I., & Krstic, M. (2016b). Sampled-data stabilization of nonlinear delay systems with a compact absorbing set. *SIAM Journal on Control and Optimization*, 54(2), 790–818.
- Karafyllis, I., & Krstic, M. (2018). Sampled-data boundary feedback control of 1-D parabolic PDEs. *Automatica*, 87, 226–237.
- Karafyllis, I., Krstic, M., Ahmed-Ali, T., & Lamnabhi-Lagarrigue, F. (2014). Global stabilisation of nonlinear delay systems with a compact absorbing set. *International Journal of Control*, 87(5), 1010–1027.
- Krstic, M. (2009). *Delay compensation for nonlinear, adaptive, and PDE systems*. Boston: Birkhäuser Boston.
- Krstic, M., & Smyshlyayev, A. (2008). *Boundary control of PDEs: A course on backstepping designs*. SIAM.
- Liu, K., & Fridman, E. (2014). Delay-dependent methods and the first delay interval. *Systems & Control Letters*, 64, 57–63.
- Logemann, H. (2013). Stabilization of well-posed infinite-dimensional systems by dynamic sampled-data feedback. *SIAM Journal on Control and Optimization*, 51(2), 1203–1231.
- Logemann, H., Rebarber, R., & Townley, S. (2003). Stability of infinite-dimensional sampled-data systems. *Transactions of the American Mathematical Society*, 355(8), 3301–3328.
- Logemann, H., Rebarber, R., & Townley, S. (2005). Generalized sampled-data stabilization of well-posed linear infinite-dimensional systems. *SIAM Journal on Control and Optimization*, 44(4), 1345–1369.
- Lozano, R., Castillo, P., Garcia, P., & Dzul, A. (2004). Robust prediction-based control for unstable delay systems: Application to the yaw control of a mini-helicopter. *Automatica*, 40(4), 603–612.
- Manitius, A. Z., & Olbrot, A. W. (1979). Finite spectrum assignment problem for systems with delays. *IEEE Transactions on Automatic Control*, 24(4), 541–553.
- Mazenc, F., & Malisoff, M. (2016). New prediction approach for stabilizing time-varying systems under time-varying input delay. In *Conference on decision and control* (pp. 3178–3182).
- Mazenc, F., & Malisoff, M. (2017). Stabilization of nonlinear time-varying systems through a new prediction based approach. *IEEE Transactions on Automatic Control*, 62(6), 2908–2915.
- Muralidhar, P., & Subbarao, K. (2009). State observer for linear systems with piecewise constant output delays. *IET Control Theory & Applications*, 3(8), 1017–1022.
- Najafi, M., Hosseinnia, S., Sheikholeslam, F., & Karimadini, M. (2013). Closed-loop control of dead time systems via sequential sub-predictors. *International Journal of Control*, 86(4), 599–609.
- Naylor, A. W., & Sell, G. R. (1982). *Linear operator theory in engineering and science*. Springer.
- Park, P., Ko, J. W., & Jeong, C. (2011). Reciprocally convex approach to stability of systems with time-varying delays. *Automatica*, 47(1), 235–238.
- Pisano, A., & Orlov, Y. (2017). On the ISS properties of a class of parabolic DPS' with discontinuous control using sampled-in-space sensing and actuation. *Automatica*, 81, 447–454.
- Robinson, J. C. (2001). *Infinite-dimensional dynamical systems: an introduction to dissipative parabolic PDEs and the theory of global attractors*. Cambridge University Press.
- Selivanov, A., & Fridman, E. (2016a). Distributed event-triggered control of diffusion semilinear PDEs. *Automatica*, 68, 344–351.
- Selivanov, A., & Fridman, E. (2016b). Observer-based input-to-state stabilization of networked control systems with large uncertain delays. *Automatica*, 74, 63–70.
- Selivanov, A., & Fridman, E. (2016c). Predictor-based networked control under uncertain transmission delays. *Automatica*, 70, 101–108.
- Selivanov, A., & Fridman, E. (2017a). Delayed boundary control of a heat equation under discrete-time point measurements. In *56th conference on decision and control* (pp. 1248–1253). IEEE.
- Selivanov, A., & Fridman, E. (2017b). Sampled-data relay control of diffusion PDEs. *Automatica*, 82, 59–68.
- Smith, O. J. M. (1957). Closer control of loops with dead time. *Chemistry Engineering Progress*, 53(5), 217–219.
- Smyshlyayev, A., & Krstic, M. (2010). *Adaptive control of parabolic PDEs*. Princeton University Press.
- Sun, Y., Ghantasala, S., & El-Farra, N. H. (2009). Networked control of spatially distributed processes with sensor-controller communication constraints. In *American control conference* (pp. 2489–2494).
- Yao, Z., & El-Farra, N. H. (2014). Data-driven actuator fault identification and accommodation in networked control of spatially-distributed systems. In *American control conference* (pp. 1021–1026).



**Anton Selivanov** received the M.Sc. degree in 2011 and the Ph.D. degree in 2014, both in mathematics and both from St. Petersburg University, Russia. Currently he is a Postdoctoral Researcher at Tel Aviv University, Israel. His research interests include time-delay systems, distributed parameter systems, networked-control systems, and adaptive control.



**Emilia Fridman** received the M.Sc. degree from Kuibyshev State University, USSR, in 1981 and the Ph.D. degree from Voronezh State University, USSR, in 1986, all in mathematics. From 1986 to 1992 she was an Assistant and Associate Professor in the Department of Mathematics at Kuibyshev Institute of Railway Engineers, USSR. Since 1993 she has been at Tel Aviv University, where she is currently Professor of Electrical Engineering-Systems. She has held visiting positions at the Weierstrass Institute for Applied Analysis and Stochastics in Berlin (Germany), INRIA in Rocquencourt (France), Ecole Centrale de Lille (France), Valenciennes University (France), Leicester University (UK), Kent University (UK), CINVESTAV (Mexico), Zhejiang University (China), St. Petersburg IPM (Russia), Melbourne University (Australia), Supelec (France), KTH (Sweden).

Her research interests include time-delay systems, networked control systems, distributed parameter systems, robust control, singular perturbations and nonlinear control. She has published more than 150 articles in international scientific journals. She is the author of the monograph *Introduction to Time-Delay Systems: Analysis and Control* (Birkhäuser, 2014). In 2014 she was Nominated as a Highly Cited Researcher by Thomson ISI. She serves/served as Associate Editor in *Automatica*, *SIAM Journal on Control and Optimization* and *IMA Journal of Mathematical Control and Information*. She is currently a member of the Council of IFAC.